




CAR & PASSENGER VEHICLE

Century Car & Passenger vehicle batteries are built tough to provide the ultimate in battery performance and reliability. Featuring internal components which are designed from the ground up to suit Australian conditions, unique design features and industry leading technologies to combat the causes of battery failure, Century Ultra Hi Performance and Hi Performance batteries deliver reliability, longer life and superior performance.

Manufactured with Calcium battery plates, advanced grid designs, optimised paste formulation and our own revolutionary maintenance free lid technology, Century Car & Passenger vehicle batteries deliver superior starting power, exceptional corrosion resistance, longer life and the performance to handle the demands of today's modern vehicles.

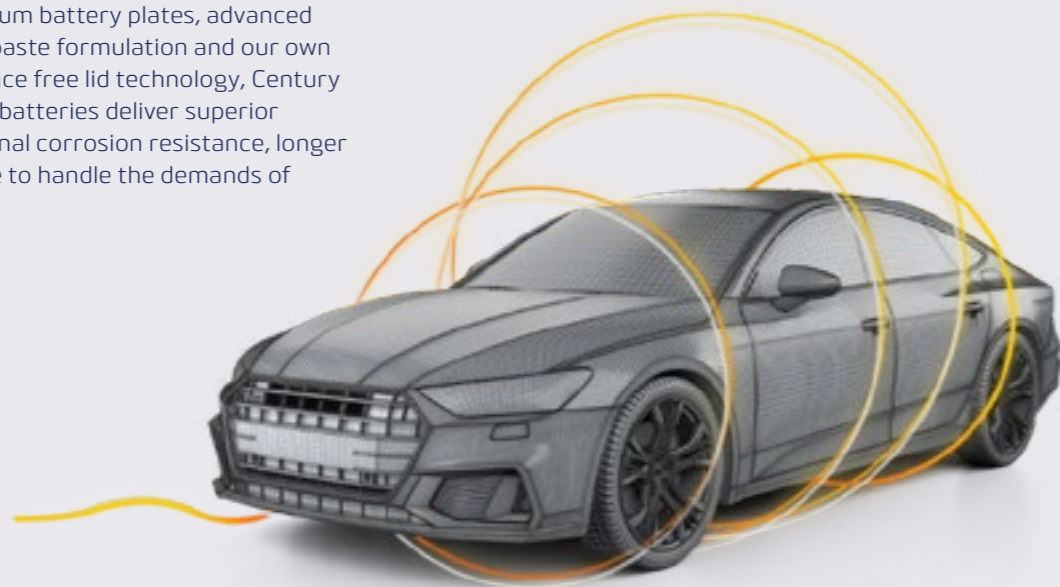

Car & Passenger Vehicle

Ultra Hi Performance

Century Ultra Hi Performance batteries are designed and built in Australia[^] to suit our local conditions, providing the ultimate in battery performance which Australians have relied on for generations. Suitable for both old and new vehicles with higher power demands, Century Ultra Hi Performance batteries are engineered to exceed leading vehicle manufacturer's standards for quality and performance, delivering exceptional starting power, maximum service life and extra power for vehicle electrics.



- ✓ Suitable for both old and new vehicles with high power demands
- ✓ Over 20% extra starting power and 30% longer life*
- ✓ Designed and built tough in Australia[^] to suit our local conditions
- ✓ Maximum service life with a sealed maintenance free design for reduced water loss



EXCEPTIONAL STARTING POWER



MAXIMUM SERVICE LIFE




EXTRA POWER FOR VEHICLE ELECTRICS



AUSTRALIAN MADE & DESIGNED

| ITEM ID | BATTERY TYPE | WARRANTY [†] | VOLTS | CCA -18°C | RC @ 25°C | AH @ 20HR | [ALL MEASUREMENTS IN MM] | | | | POLARITY | WEIGHT (KG) | TERM. TYPE | HOLD DOWN | SPECIAL FEATURES |
|---------------------------------|--------------|-----------------------|-------|-----------|-----------|-----------|--------------------------|-----|-----|-----|----------|-------------|------------|-----------|---------------------------------|
| | | | | | | | L | W | H | TH | | | | | |
| ULTRA HI PERFORMANCE | | | | | | | | | | | | | | | |
| 107120 | 67 MF | 40 | 12 | 640 | 115 | 64 | 231 | 171 | 184 | 205 | D | 15.60 | STD | SIDE/ END | CH, CI, CV, FA, MF, MIA, MR |
| 107121 | 67EF MF | 40 | 12 | 640 | 115 | 64 | 231 | 171 | 184 | 208 | D | 15.60 | STD | - | CH, CI, CV, FA, MF, MIA, MR |
| 107122 | 68 MF | 40 | 12 | 640 | 115 | 64 | 231 | 171 | 184 | 205 | C | 15.60 | STD | SIDE/ END | CH, CI, CV, FA, MF, MIA, MR |
| 107124 | 75D23L MF | 40 | 12 | 620 | 120 | 70 | 231 | 171 | 202 | 225 | C | 16.80 | STD | SIDE | CH, CI, CV, FA, MF, MIA, MR |
| 107123 | 75D23R MF | 40 | 12 | 620 | 120 | 70 | 231 | 171 | 202 | 225 | D | 16.80 | STD | SIDE | CH, CI, CV, FA, MF, MIA, MR |
| 107130 | NS40ZLX MF | 40 | 12 | 410 | 65 | 42 | 196 | 128 | 201 | 220 | C | 10.90 | SP | - | CH, CI, CV, FA, MF, MIA, MR |
| 107132 | NS40ZLSX MF | 40 | 12 | 410 | 65 | 42 | 196 | 128 | 201 | 220 | C | 10.90 | STD | - | CH, CI, CV, FA, MF, MIA, MR |
| 107128 | NS60LSX MF | 40 | 12 | 480 | 80 | 50 | 235 | 128 | 201 | 220 | C | 12.70 | STD | - | CH, CI, CV, FA, MF, MIA, MR |
| 107127 | NS60SX MF | 40 | 12 | 480 | 80 | 50 | 235 | 128 | 201 | 220 | D | 12.70 | STD | - | CH, CI, CV, FA, MF, MIA, MR |
| ULTRA HI PERFORMANCE DIN | | | | | | | | | | | | | | | |
| 109112 | DIN53LX MF | 40 | 12 | 600 | 105 | 60 | 242 | 175 | 175 | 175 | C | 14.40 | STD | SIDE/ END | CH, CI, CV, FA, MF, RP, VR |
| 113112 | DIN65LHX MF | 40 | 12 | 760 | 145 | 77 | 277 | 175 | 190 | 190 | C | 19.50 | STD | SIDE/ END | CH, CI, CV, FA, MF, MIA, MR, RP |
| 113113 | DIN65RHX MF | 40 | 12 | 760 | 145 | 77 | 277 | 175 | 190 | 190 | D | 19.50 | STD | SIDE/ END | CH, CI, CV, FA, MF, MIA, MR, RP |
| 109110 | DIN75LHX MF | 40 | 12 | 910 | 180 | 90 | 315 | 175 | 190 | 190 | C | 21.30 | STD | SIDE/ END | CH, CI, CV, FA, MF, RP |
| 109111 | DIN75RHX MF | 40 | 12 | 910 | 180 | 90 | 315 | 175 | 190 | 190 | D | 21.30 | STD | SIDE/ END | CH, CI, CV, FA, MF, RP |



[†] Conditions apply. Refer to individual warranty statements attached to each battery.
^{*}Based on NS40ZLX MF and NS40ZL MF
[^]Selected items only.