




ADVANCED TECHNOLOGY FOR IDLE STOP START & HYBRID VEHICLES

Century ISS Active & Hybrid batteries represent the latest in performance for vehicles with Stop Start or Micro Hybrid technology. They are specially designed to meet or exceed the requirements of vehicles fitted with Idle Stop Start systems, providing fuel saving and reduced emissions benefits.

Century ISS Active AGM and EFB batteries incorporate innovative design features and are built from the finest raw materials to deliver superior cycling performance, rapid recharging between repeated engine starts, and the extra power required to run your vehicle's on-board electrics whilst the engine is stopped.

The Century Hybrid Auxilliary battery range is also available for hybrid vehicles - providing superior cycling performance and dependable auxilliary power to run the vehicle's on-board electrics and computer management systems. They've been designed from the ground up with an improved micro-cycling ability to enable the battery to recharge faster.

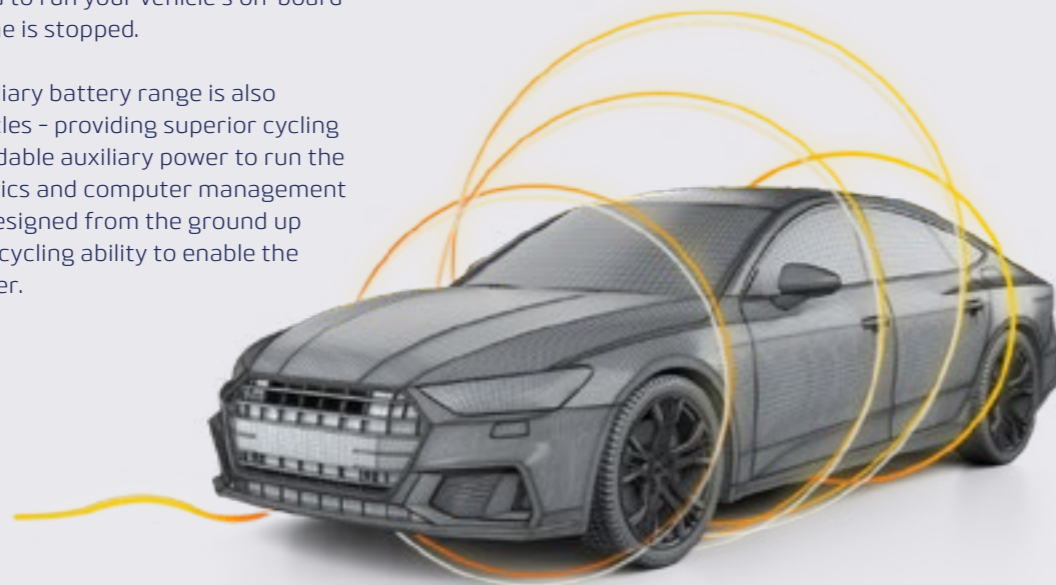

ISS Active




ISS Active EFB

A range of original equipment (OE) grade Enhanced Flooded Batteries (EFB) which are used and endorsed by some of the world's leading car brands. The ISS Active EFB range is designed to help reduce fuel consumption and CO₂ emissions in vehicles fitted with standard Idle Stop Start systems.

- ✓ Direct OE replacement - perfect for replacing your vehicle's original equipment battery*
- ✓ Lithium carbon additive for up to 50% faster recharging and 2x higher cycling performance
- ✓ Thicker and stronger internal components for increased shock and vibration resistance
- ✓ Recommended upgrade for standard vehicles subjected to repeated short journeys

ITEM ID	BATTERY TYPE	WARRANTY†	VOLTS	CCA -18°C	RC @ 25°C	AH @ 20HR	(ALL MEASUREMENTS IN MM)				POLARITY	WEIGHT (KG)	TERM. TYPE	HOLD DOWN	SPECIAL FEATURES
							L	W	H	TH					
ISS ACTIVE EFB															
106100	Q85	36	12	650	112	67	230	171	202	225	C	18.20	STD	-	EFB, LI, LM
106110	Q85R	36	12	650	113	67	232	173	202	225	D	18.30	STD	-	CH, CI, EFB, LI, LM
106111	S95	36	12	760	127	68	260	173	200	225	C	19.40	STD	-	EFB, LI, LM
106101	T110	36	12	810	155	80	305	173	202	225	C	23.30	STD	-	EFB, LI, LM



† Conditions apply. Refer to individual warranty statements attached to each battery.
*Available November 2020