




DEEP CYCLE

Century Deep Cycle batteries are designed and built to endure the uncompromising demands of Australia's harsh environment. Available in Flooded, AGM and GEL variants, Century Deep Cycle batteries deliver long-lasting, dependable power for accessories and are ideal as secondary batteries in recreational & commercial applications - including 4x4s, caravans and recreational vehicles, golf carts, wheelchairs, mobility scooters, marine systems, dual-battery systems and industrial equipment.

Century Deep Cycle batteries are manufactured using the toughest internal components, and are engineered to withstand heavy discharge and recharging cycles without damaging critical internal components. Deep Cycle batteries are most often used to supply power to accessories such as lights, heaters, fridges, fish finders, navigation devices, winches, pumps, plus other commercial applications including golf carts, scissor and boom lift machines.

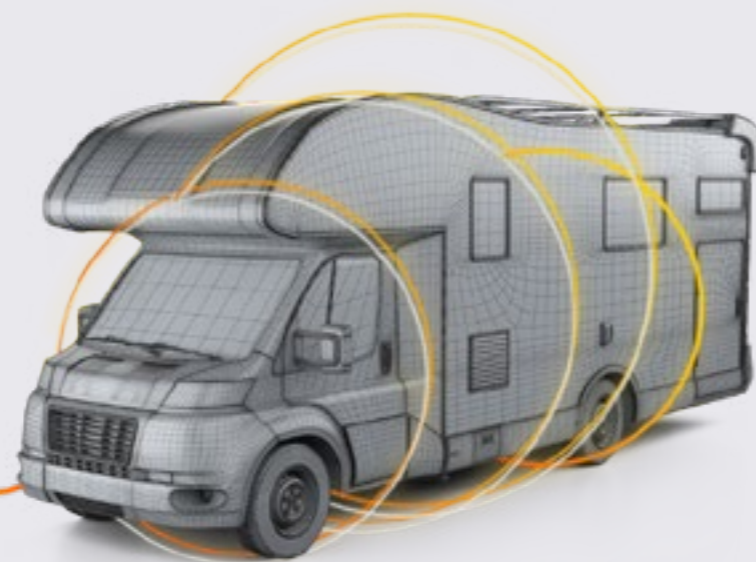

SEASONAL USE

For seasonal use, fully recharge the battery before putting into storage. Check the state-of-charge or voltage regularly. Should the voltage drop below 12.5 volts, recharge the battery. It is important to check the battery completely before reconnecting to the electrical devices.

Deep Cycle

Deep Cycle Flooded

Century Flooded Deep Cycle batteries are designed and built right here in Australia[^] to handle our extreme climate and harsh operating conditions. They are a robust and dependable range of batteries designed for conventional applications and installations where reliable, long lasting power supply is required.



- ✓ Dependable cycling performance with superior heat resistance
- ✓ Platelock™ technology reduces movement of internal plates for improved vibration resistance[^]
- ✓ Full frame cast plates with glass mat separators for extra strength & cycling performance
- ✓ Designed for under bonnet use in 4x4's, SUV's, recreational and commercial vehicles



LONG CYCLE LIFE



DEEP DISCHARGE CAPABILITY



IMPROVED RECHARGE EFFICIENCY




REDUCED SELF DISCHARGE



SUPERIOR HEAT RESISTANCE

ITEM ID	BATTERY TYPE	WARRANTY†	VOLTS	AH @ 20HR	DIMENSIONS (ALL MEASUREMENTS IN MM)				POLARITY	WEIGHT (KG)	TERM. TYPE	HOLD DOWN	SPECIAL FEATURES
					L	W	H	TH					
DEEP CYCLE FLOODED													
141114	12A	12	6	105	227	173	184	205	A	15.80	STD	-	CH, GM, LM
141116	89T	12	12	125	347	175	260	285	C	34.00	STD	-	CH, GM, LM, MR, VR
145108	D23LT MF	12	12	65	230	171	202	222	C	17.10	STD	-	CH, CI, MF
145109	D23RT MF	12	12	65	230	171	202	222	D	17.10	STD	-	CH, CI, MF
141135	N70T	18	12	102	305	171	202	225	D	25.10	STD/WN	-	CH, CI, GM, LM, MIA, MR, PL, VR
145106	N70TX MF	12	12	95	302	172	202	225	D	21.50	STD/WN	SIDE	CH, CI, CV, FA, GM, MF MR, PL, VR
145107	NS70TX MF	12	12	82	260	171	202	222	D	18.60	STD/WN	SIDE	CH, CI, CV, FA, GM, MF, MR, PL, VR

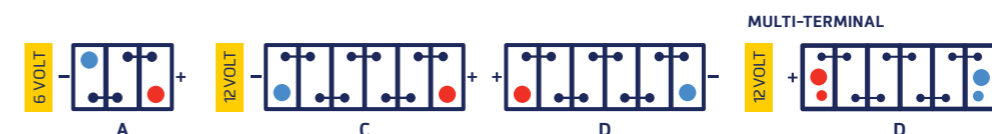

† Conditions apply. Refer to individual warranty statements attached to each battery.
[^]Selected items only.