


ODYSSEY[®]

BATTERY



Drawings & Terminal Position

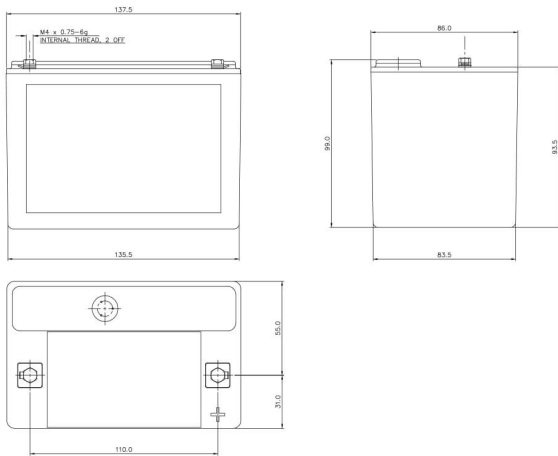

Handling and Storage

- Can be mounted or stored in any orientation except inverted
- 2-years storage life at 68°F (20°C) without needing to charge. Recharge when the OCV is <12.6V (50% SOC).
- Classified as non-spillable and approved as non-hazardous cargo for ground, sea and air transportation in accordance with the requirements of IMDG (International Maritime code for Dangerous Goods) and ICAO (International Civil Aviation Organisation)

Charging and Self-Discharge

Type of charging curve	IUU
Charger voltage at 68°F (20°C)	14.4V to 14.8V
Self-discharge per month at 68°F (20°C)	1.25%
Self-discharge per month at 104°F (40°C)	5%
80% depth of discharge cycles	400

Technical Data Sheet

ODS-AGM8E

(PC310)

Battery Type

- Internal threaded tin-plated brass terminals, SS M4 bolts
- Absorbed Glass Mat (AGM) with Thin Plate Pure Lead (TPPL)
- Advanced dual purpose battery for engine start and deep cycle use

Power and Performance

Voltage	12
Pulse (5 second) Hot Cranking Amps (PHCA)	310
Cold Cranking Amps (CCA)	100
HCA	200
MCA	155
20Hr Nominal Capacity (Ah)	8
10Hr Nominal Capacity (Ah)	7
Reserve Capacity Minutes	9
Terminal	M4 Receptacle
Torque Spec	8.9 (1.0)
Internal Resistance	27.1
Short Circuit	455

Dimensions and Weight

Length	5.4 in / 137 mm
Width	3.4 in / 86 mm
Height (terminals included)	3.9 in / 99 mm
Height (container)	3.9 in / 99 mm
Weight	5.9 lbs / 2.7 kg

Temperature

Operating temperature range	-40°F / -40°C to 122°F / +50°C
Optimum storage temperature	68°F / +20°C

Accreditations

The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified.

*Cold Start Performance S.A.E J537 Apr 2016



© 2021 EnerSys. All rights reserved. Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E.&O.E.
Date Downloaded: July 29, 2021